

The Noxon range of pallet wrappers deliver robust system's to suit all warehouse environments and applications. The wrappers are available from economical semi-automatic systems to automatic and fully automated pallet wrapping conveyor systems.

- Semi automatic operation, attach film and press start
- Robust construction, smart design and features
- Pre stretcher for lower wrapping costs
- Optional extras to suit all applications
- User friendly control panel
- Automatic height sensing
- 2000kg maximum load capacity
- 2100mm mast height
- Low profile design for ease of loading
- Soft start for unstable loads
- Easy film loading
- Variable speed turntable & carriage speed
- Programmable wrapping cycle
- Manual/Automatic mode



When quality matters

Freesby®

:: Sydney 02 9604 7766 :: Melbourne 03 9465 1500 :: Brisbane 07 3277 2177


Freesby®

Specifications

Turntable Height	77mm	
Turntable Diameter	1650mm	
Maximum film height roll	500mm	
Maximum film roll diameter	300mm	
Maximum load weight	2000kg	Up to 3000kg optional
Maximum Load height	2100mm	Extended mast optional
Power supply	240V x 10amps	
Machine Dimensions	2480mm x 1759mm	

Pre stretch units

11



Carriage with pre-stretch rollers at fixed percentage that may be changed by substituting the gears at the top of the rollers. Std pre-stretch 150% Pre-stretch configuration possible from 50% to 250%.


12



Carriage with continuous-change electronic motor driven pre-stretch, adjustable through the panel. Film is dispensed automatically, electronically assisted, at variable speed depending on request. Pre-stretch configuration up to 300%.



Loading ramp for pallet jack

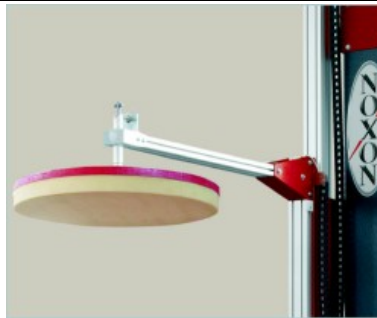

Top Platen for light and unstable load



Underground template to create a flush operation surface



When quality matters

:: Sydney 02 9604 7766 :: Melbourne 03 9465 1500 :: Brisbane 07 3277 2177

www.austwrappingco.com.au